


# Double Lanes Full Height TURNSTILE

304 stainless steel plate stamping molding, handsome appearance rust, durable, can resist external damage

- With 0-bit self-test function to facilitate user maintenance and use.
- Through the built-in small disk on the main control board, programmable device running state.
- This section of the full height of the switch to a new second-generation movement.
- 60 degree mechanical anti-creeping function.
- Anti-collision function, in the absence of receiving the opening signal, the brake rod automatically locked dead.
- Free access to power, in line with fire requirements.

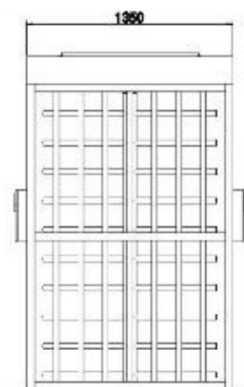

## SPECIFICATION

**Structure :** Frame structure / ss shell

**Overall dimensions :** (W)1350mm\*(L)2300mm\*(H)2200mm

**Operating voltage :** AC220 ± 10%v ± 10%hz 100

**Brake rod Length :** 600MM

**Temperature :** -10°C ~ °C

**Opening time :** 0.2 sec

**Normal work life :** >3000000times

**Communication interface :** TCP/IP/RS232 /RS485/C



**+91 8448239993**

[www.bioroles.com](http://www.bioroles.com) | [info@bioroles.com](mailto:info@bioroles.com)