



Boom Barrier BM-2118-UL

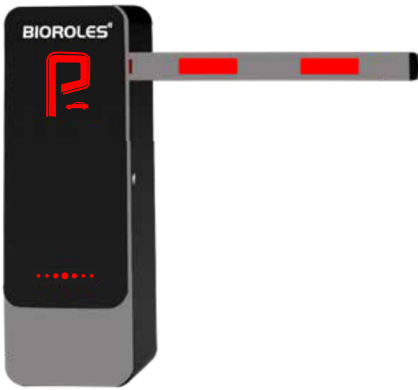


Features

- The operating speed of Barrier is 1.5 Sec - 5 Sec (adjustable according to different boom arm length)
- Reversible boom arm direction, compact and straightforward transmission mechanism, easy to install on-site
- Manual raising of the gate arm; anti-smashing
- The body of Barrier is made of 1.5mm Powder coated Mild Steel plate and acrylic glass
- The gate arm will move to the original position when it detected something blocked it
- 24V backup battery, ensuring normal operation when power is unexpectedly disconnected (Optional)

Dimension

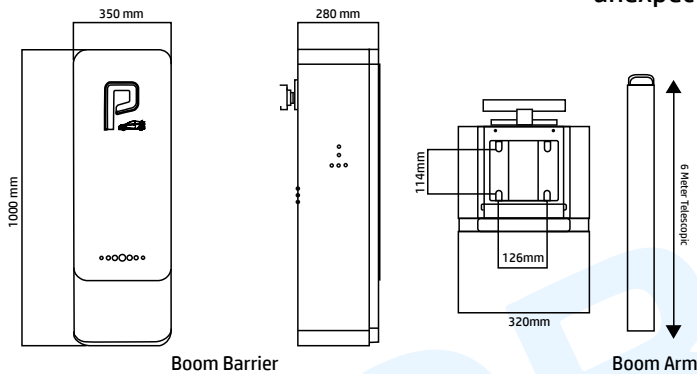

Directions :

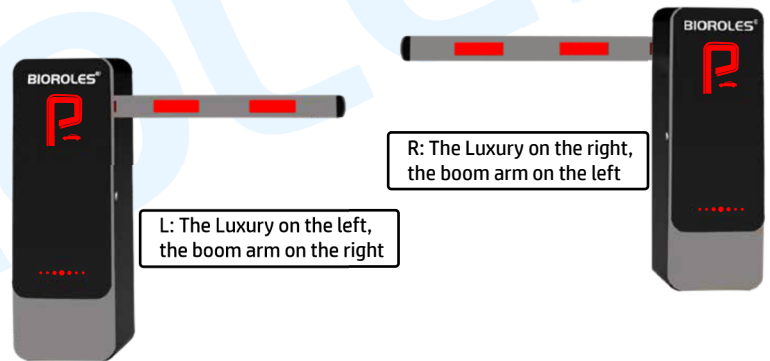

Specification

Motor	: DC24V Brushless Heavy Duty Motor
Power Consumption	: 150W
Boom Arm	: 6 Meter Telescopic
Life Cycle	: 8 Million Times
Arm Speed	: 1.85-55 (can Set)
Operating Voltage	: 220V±10% 50~60Hz
IP Rating	: IP54
Communication	: RS485/Dry Contact
Operation Condition	: -30°C~70°C
Operating Humidity	: 20%~95% No Condensation
Housing Thickness	: 1.5mm
Body Material	: Carbon Steel Paint+Baking finish + Acrylic
Dimensions	: 280x280x1000mm
Railing size	: folding stick≥5m, rack staks≥5m, straightbar≥6m
Net Weight	: 51 Kg

