




18 Zone Walk Through Metal Detector

BS-30/18

Features

- Double sets high brightness red-green digital tube display
- Integrated four-button panel operation mode
- Multi networking interface
- Pass people statistics function
- Alarm statics function
- Password protection
- Ultra-brightness patch double row regions indicator light
- 50 optional working frequency bands
- Independent 12 probe interactive 18 sector
- Alarm volume adjustable mode

Dimension

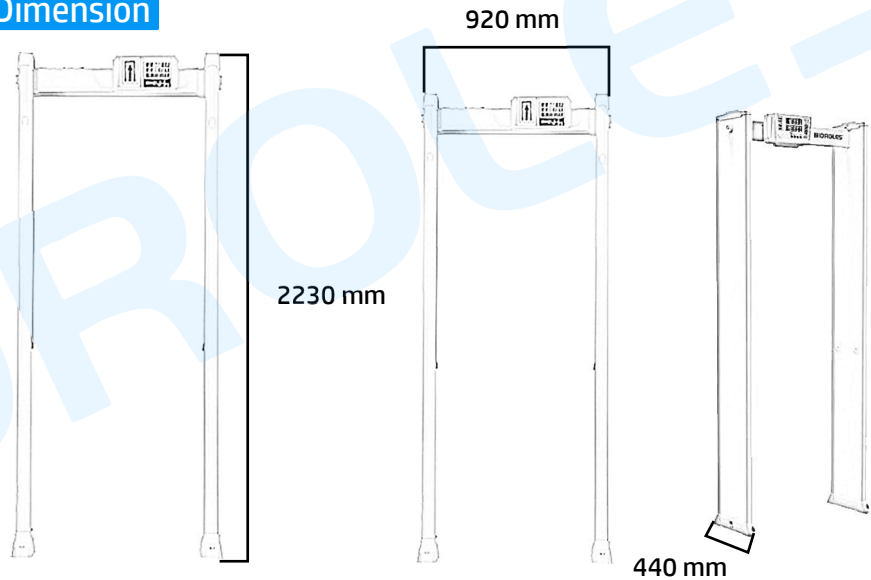

Technical Parameters

Operating Voltage	AC90V~240V 50/60Hz
Power Consumption	20W
Operating Frequency	1-50 Bands
Working Temp	-20℃~65℃
Vertical Dimension	2230 x 920 x 440mm
Aisle Dimension	2000 x 715mm



Technical Standard

Refer to EN60950 safety standard for electrical appliances	Compliance
Radiation shall be implemented according to EN50081-1 standard	Compliance
Refer to EN50082-1 standard for anti-interference	Compliance
The enterprise has passed the ISO9001:2008 quality management system certification	●
The enterprise has passed OHSAS 8001 occupational health certification	●
The enterprise has passed ISO14001 environmental management certification	●
The product has passed the EU CE certification	●

Functional Configuration

Portable metal objects can be excluded	○
Double groups of high brightness red green digital tube display function	●
Integrated four button panel operation mode	●
Multiple networking interfaces	/
External control alarm device port	/
Secondary development port/upgrade port	/
Number of Passed statistical function	●
Statistics of alarm times	●
Inquire through the number of people	●
Password protection function	○
Multi location simultaneous detection and alarm function	/
Intelligent differentiation function for detection of large items	/
Super brightness chip intelligent partition alarm indicator	/
Super brightness patch double row location indicator	/
100 selectable working frequency bands	●
Alarm sound mute mode setting	●
Alarm sound adjustable mode	●
Multiple alarm sound selection modes	●
Front and rear unilateral position alarm indicator switch function	/
Infrared start/stop function	●
Front bilateral zone alarm indicator	/
Front and rear four-sided zone alarm indicators	/
Adjustable sensitivity for each detection zone	●
Adjustable sensitivity from 0 to 399 levels in each zone	●
Safety level 0-99 selectable	●
Independent 8 probe interactive 1 zone defence	●
Battery life 2 hours/optional	/
Battery life 8 hours/optional	/
A wide selection of quick set-up scenes	●
Factory reset function	●

