



PRODUCT CATALOGUE

Turnstiles Barrier Gates

Boom Barriers

Parking Solutions

Door Frame Metal Detectors

Time Attendance

Access Control

Guard Patrol System

Smart Locks

Access Control Accessories

BIOROLES Is Fastest Growing Brand In The Field Of Entrance Automation, Access Control Systems, Time Attendance System, Smart Locks And Allied Products.

Our Product Comprises Boom Barriers, UHF Controller, Metal Detectors, Barrier Gates, Guard Patrol System, Finger & Face Attendance System, Access Control System, Smart Door Locks And Widest Range Of Access Control Accessories In India. We Ensure All Our Products Meet The International Standards And We Adopt Strict Quality Control Approach While Manufacturing & Test Functioning & Compatibility. We Have Gained Trust Of Our Clients Due To Our Range Of Quality Products And Excellent After Sale Services. Customer's Satisfaction Is The Driving Force Of Our Organization And We Strive Hard To Meet The Exact Requirements Of Customers' Needs.

We Are Backed By A State-Of-The-Art Infrastructure, R&D Unit And Efficient Workforce Support. We Look Forward To Understand Your Needs And Design Appropriate Solution In Most Competitive Prices. The Focus Of Our Company Is To Develop Local Content And Promote "Make In India" Mission.

Today, Bioroles Has Pan India Presence Through Our More Than 1500+ Active Channel Partners. For The Requirements From Clients And Market Orientation, We Also Offer Flexible, Customized And Diverse Services To Assist Our Partners And Customers To Face The Changing And Competitive Market. Global Localization And Local Globalization, Through Our R&D And Sales Network.

BIOROLES State-Of-The-Art Production/Testing Facility Based In India Has Revolutionized The Provision Of Oem And Private Label Services To Customer, Some Of Leading Brands In The World.

BIOROLES Offers A One Stop Solution For All Your Security Products And Related Software Solutions Choose From A Wide Range Of Products, Including Boom Barriers, UHF Controller, Metal Detectors Barrier Gates, Guard Patrol System, Finger & Face Attendance System, Access Control System, Smart Door Locks And Related Accessories.

Turnstiles Barrier Gates	1-3	Boom Barriers	4-7
Door Frame Metal Detectors	8-9	Entrance Gate Automation	9-10
Time Attendance	11-12	Access Control	12-15
Guard Patrol System	16	Smart Locks	17
Access Control Accessories	18-22	Software Solutions	23-24

1500+
Channel Partners



GeM
Government
E Marketplace



Turnstiles Barrier Gates



Swing Barrier

BSD-501/502

- ✦ Protection Level :IP54
- ✦ Structure: 304 Stainless Steel
- ✦ Structure: Tempered Glass/Acrylic
- ✦ Size:1000x180x980mm
- ✦ Access Weidth:600mm(1000mm Maximum)
- ✦ Swing Direction : One Way/Two Way
- ✦ Power Voltage:AC100v-248v,50hzPlus/Min Us 4%
- ✦ Drive Motor:DC24VBrushless
- ✦ Passing Speed :35-45 Person/Minute
- ✦ Material Thickness:1.2mm/1.5mm
- ✦ MTBF : 9 Million



Swing Barrier

BSD-628/ BSD-628D

- ✦ Protection Level :IP54
- ✦ Structure: 304 Stainless Steel
- ✦ Structure: Tempered Glass/Acrylic
- ✦ Size:1200x185x980mm
- ✦ Power Voltage : 220V±10% 50Hz
- ✦ Power Consumption : -15°C ~ +70°C
- ✦ Drive Motor:DC24VBrushless
- ✦ Passing Speed :35-45 Person/Minute
- ✦ Material Thickness:1.2mm/1.5mm
- ✦ MTBF : 9 Million



Swing Barrier

BSD-627/627D


- ✦ Protection Level :IP51
- ✦ Structure: 304 Stainless Steel
- ✦ Structure: Tempered Glass/Acrylic
- ✦ Size:1200x140x1000mm
- ✦ Power Voltage : 220V±10% 50Hz
- ✦ Power Consumption : - 40°C ~ +70°C
- ✦ Drive Motor:DC24VBrushless
- ✦ Passing Speed :35-45 Person/Minute
- ✦ Material Thickness:1.2mm/1.5mm
- ✦ MTBF : 5 Million



P Type Swing Barrier

BV-PTP01

- ✦ Structure: 304 Stainless Steel
- ✦ Size:420x300x980mm
- ✦ Power Voltage : 220V±10% 50Hz
- ✦ Power Consumption : - 40°C ~ +70°C
- ✦ Drive Motor:DC24VBrushless
- ✦ Passing Speed :35-45 Person/Minute
- ✦ Material Thickness:1.2mm/(customizable)
- ✦ MTBF : 9 Million

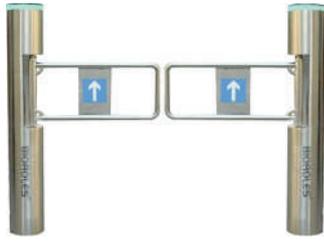

Swing Barrier

BTP-06

- ❑ Material : 1.2/2.0mm 304 Stainless Steel
- ❑ Size : 168x550x1050 mm
- ❑ Input Voltage : 100V-240V
- ❑ Motor Type : 24VDC Motor
- ❑ Motor Power : 35 W
- ❑ Input Signal : Dry Contact/Rs485
- ❑ Environment : 20- +70°C
- ❑ MTBF : 6 Million



BTP-02

Bridge Type Gate

- ❑ Semi/Full Automatic Mechanism
Bridge Type And 304 Stainless
Steel Housing With Drop-Off Arm
- ❑ Transit Speed: 25-30 Person Traffic
Light/Pass Indicator, Bi-Directional/Single
- ❑ Size: 1200 x 350 x 900mm
- ❑ MTBF : 9 Million



Tripod Turnstile

BTP-01

- ❑ Semi Automatic Mechanism
Vertical- Type And 304 Stainless
Steel Housing With Drop- Off Arm,
- ❑ Transit Speed -25-30 Person,
- ❑ Traffic Light /Pass Indicator,
Bi-Directional/Single Directional
- ❑ Size:420x350x900mm
- ❑ MTBF : 9 Million



**Dual Lane Tripod
Turnstile**

BTP-01D

- ❑ Semi Automatic Mechanism
Vertical-Type And 304 Stainless
Steel Housing With Drop-Off Arm
- ❑ Transit Speed: 25-30 Person
- ❑ Traffic Light/Pass Indicator, Bi-Directional
/Single Directional
- ❑ Size: 420 x 350 x 900mm
- ❑ Double Lane Semi-Automatic Vertical
Electric Tripod Turnstile
- ❑ 420 x 450 x 980mm, 1.2mm Thickness
304 Stainless Steel
- ❑ MTBF : 9 Million



Flap Barrier Gate

BFB-01/01D

- ❑ Structure: 304 Stainless Steel Frame Structure And Plastic Case
- ❑ Swing Direction : One-Way/Two-Way
- ❑ Anti-reverse: With Anti-Reverse Function To Ensure One Card Per Person
- ❑ Power Voltage : AC198V-248V, 50hz±4%
- ❑ Output: AC 24V, DC12V
- ❑ Passing Speed: 35-45 Person/Minute
- ❑ Size: 1200 X 280 X 990 mm
- ❑ MTBF : 9 Million



Sliding Barrier Gate

BS-04/04D

- ❑ Structure: 304 Stainless Steel Structure Tempered Glass, Acrylic
- ❑ Size: 1400×190×980mm
- ❑ Access Width: 600mm (1000mm Maximum)
- ❑ Swing Direction: One Way/Two Way
- ❑ Power Voltage: AC100V-248V, 50hz±4%,
- ❑ Drive Motor DC 24V Brushless
- ❑ Passing Speed: 35-45 Person/Minute
- ❑ Material Thickness: 1.2mm/1.5mm
- ❑ MTBF : 9 Million



FH1
Full Height Turnstile Single Lane

- ❑ Automatic Full Height Turnstile IC, ID, Magnet Card, Bar Code And Anti- Static, Etc.Control Devices Compatible, Stable Barrier Bar Operation, Low Noise, Fast And Reliable Unlocking, Cut off Emergency Function, Meet The Fire Safety Requirements, Standard Input And Output Interface
- ❑ Size: (W)1350mm*(L)1450mm*(H)2200mm
- ❑ Material: 304 SS
- ❑ Drive Mode: Mechanical
- ❑ Input 10-20W
- ❑ MTBF : 5 Million



FH2
Full Height Turnstile Dual Lane

- ❑ Automatic Full Height Turnstile IC, ID, Magnet Card, Bar Code And Anti- Static, Etc.Control Devices Compatible, Stable Barrier Bar Operation, Low Noise, Fast And Reliable Unlocking, Cut off Emergency Function, Meet The Fire Safety Requirements, Standard Input And Output Interface
- ❑ Size: (W)1350mm*(L)2300mm*(H)2200mm
- ❑ Material: 304 ss
- ❑ Drive Mode: Mechanical
- ❑ Input 10-20W
- ❑ MTBF : 5 Million

Boom Barriers



BM-AC6M

- ❑ Electro-Mechanical Barrier. Mild Steel With Power Coating Plus Anti-Corrosion Treatment, AC Motor
- ❑ Speed : 1.5-6 Sec
- ❑ Power Supply : 220-230V AC,50/60 Hz
- ❑ Boom Lenth Upto 6 Meter
- ❑ Protection Class : IP55
- ❑ Right/Left Side Installation
- ❑ MTBF : 6 Million




BM-DC48

- ❑ DC 24V BLDC Motor Barrier With 6M Boom Telescopic
- ❑ Speed 1.5-6 sec
- ❑ Motor Power :120W
- ❑ Power Supply : AC220V
- ❑ Protection Class : IP54
- ❑ Direction: Right Hand / Left Hand Version
- ❑ Working Temperature:-30°C~80°C
- ❑ MTBF : 6 Million



BM-DC36L

- ❑ DC 24V,BLDC Motor,1.5-6 sec , 6m Boom Arm Right /Left Side Installation,
- ❑ Speed : 1.5-6 Sec
- ❑ Motor Power : 165W
- ❑ Protection Class : IP55
- ❑ Power Supply : AC 220V60Hz
- ❑ Max Torque 300nm Back-Up,
- ❑ MTBF :8 Million

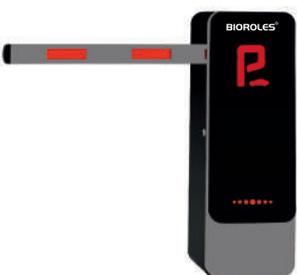

BM-2118-UL


- ❑ DC24V BLDC Motor, 1.5-5sec Can Be Adjustable With 6m Boom Right/Left Side Installation
- ❑ Motor Power : 150 W,
- ❑ Speed : 1.5-5Sec
- ❑ Protection Class: IP54
- ❑ Power Supply: 220V±10% 50~60Hz
- ❑ MTBF : 8 Million



BM-2121-UL

- ❑ Industrial Garde BLDC Barrier
DC24V, 1.5-5sec Can Be Adjustable
With 6m Boom Right/left Side Installation
- ❑ Motor Power: 24V DC Brushless Motor
- ❑ Power Supply: AC220V 60Hz
- ❑ Speed : 1.5-5 Sec
- ❑ Motor Power : 180W
- ❑ Protection Class: IP55
- ❑ Torque 300nm Back-Up,
- ❑ MTBF :12 Million

Toll Gate Barrier

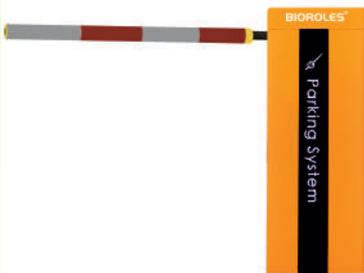

BM-DCT05

- ❑ Boom Type : Round Carbon Fiber
- ❑ Motor Voltage : DC24V
- ❑ Max Boom Length (Meters: M) : 3~4M
- ❑ Power Supply Input Voltage : AC100-265V
- ❑ Speed :0.6-1Sec
- ❑ Motor Power : 240W
- ❑ Working Temperature :-30°C~+ 70°C
- ❑ Duty Cycle :100%
- ❑ Protection Class: IP54
- ❑ Max Motor Speed :1000r/min
- ❑ MTBF : 10 Million

Toll Gate Barrier



BM-DCT04

- ❑ Industrial High Speed DC Barrier Gate
- ❑ DC Brushless Servo Motor With Frequency Conversion Control, Allow For A Smooth Trip Of The Gate Arm With No Bounce In The End Position
- ❑ Speed : 0.4- 0.9Sec
- ❑ Motor Power : 300W
- ❑ 100% Duty Cycle
- ❑ Upto 6Mtr Boom
- ❑ Protection Class IP55, Right/Left Side Installation
- ❑ MTBF :10 Million

Toll Gate Barrier



BM-DCT06

- ❑ Industrial High Speed Barrier for Toll Gate
- ❑ 24V DC Brushless Motor ,Max Boom Size 3 meter
- ❑ Power Supply: AC 220V 60 Hz
- ❑ Speed: 0.3-6 Sec
- ❑ Motor Power : 240W
- ❑ Max Torque 300nm Back-Up, A Pair Of 433 Mhz Remote Controllers.
- ❑ Protection Class: IP55
- ❑ MTBF:8 Million

Boom Barrier Parts & Accessories



FBA01

Boom Fence Arm



FLBA01

Folding Boom Arm: Main Boom
2 Meter + Vice Boom 2 Meter



Boom Arm

Telescopic Boom Arm
Upto 6 Meter



Boom Arm

Straight Boom Arm
Upto 6 Meter



PC-101

Beam Sensor
100 Mtr



PC-10

Photocell Sensor For
Boom Barrier



PC-11

High Quality Photo Cell



LD1

Single Loop Detector/
Dual Loop Detector



PC-12S

Solar Type Battery
Photocell HW-09



PC-15RF

Mirror Reflector
Beam Sensor



RD-10

Radar Sensor For Boom
Barrier & Turnstiles

ANPR Camera & UHF Reader



B-019D

Display For ANPR Camera

- All-In-One IP66 Waterproof Rating Design LPR Camera
- 4 Line LED Display Built In
- Guidance/Welcome Message Show License Plate Number



U60R

UHF Desktop Reader Writer
Interface : USB
Operating Mode : USB Read



B-LPR-4

ANPR Camera

- License Plate Recognition Camera,
- 2 Million Starlight Imaging Effect, Dual Core Processor CNN Acceleration
- VIR 4.0 Algorithm Supports Comprehensive And Accurate Vehicle Information Identification
- 11 Types Of Vehicle Identification
- All Day License Plate Recognition Rate Is 99.8%:
- 100ms Fast Opening Experience
- Designed For Unattended, Easy To Install And Maintain
- It Supports Tf Card Data Storage
- Solutions Such As Vehicle Non Parking Charge, Vehicle Access Management, Parking Time Charge, Parking Space Reservation, Big Data Collection, VIP Member Management, Etc.



BS-UR05

UHF Reader

- Frequency: 902~928MHz (US 865~868Mhz (EU)
- Protocol: ISO18000-6C(EPC GEN2)
- Antenna: Built In 7Dbi Antenna
- Work Mode: Active Mode, Answer Mode Trigger Mode (Optional)
- Reading Distance: 0~7 Meter (Depends On Tag)
- RF Power: 30DBM (Adjustable)
- Communication Interface: USB, WG26.TRIGGER
- Power Supply : 12V 2A



BS-UR09

UHF Reader

- Frequency: 902~928Mhz (US) 865~868Mhz (EU)
- Protocol: ISO18000-6C(EPC GEN2)
- Antenna: Built in 9dbi Antenna
- Work Mode: Active Mode, Answer Mode Trigger Mode (Optional)
- Reading Distance: 0~10 Meter (Depends On Tag)
- RF Power: 30Dbm (Adjustable)
- Communication Interface: USB, WG26.Trigger
- Power Supply: 12V 2A



BS-UR09R

UHF Reader

- Frequency: 902~928MHz (US) 865~868MHz (EU)
- Protocol: ISO18000-6C(EPC GEN2)
- Antenna: Built In 9Dbi Antenna
- Work Mode: Active Mode, Answer Mode, Trigger Mode (Optional)
- Reading Distance: 0~10 Meter (Depends On Tag)
- RF Power: 30Dbm (Adjustable)
- Communication Interface: USB, Wg26.Trigger
- Power Supply: 12V 2A



BS-UR15

UHF Reader

- Frequency: 902~928MHz (US) 865~868MHz (EU)
- Protocol: ISO18000-6C(EPC GEN2)
- Antenna: Built In 12Dbi Antenna
- Work Mode: Active Mode, Answer Mode, Trigger Mode (Optional)
- Reading Distance: 0~15 Meter (Depends On Tag)
- RF Power: 30dbm (Adjustable)
- Communication Interface: USB, WG26.Trigger
- Power Supply: 12V 2A

Door Frame Metal Detector



5 Zone DFMD
BS-27/5

- ❑ 5 Zone Door Frame Metal Detector
- ❑ Maximum Sensitivity 30g Metal
- ❑ Digital Display On The Main Control Box
- ❑ People Count,
- ❑ Detected Metal Quantities
- ❑ Alarm Frequency
- ❑ Suitable For Indoor Use
- ❑ Working Voltage AC90V~240V 50/60hz
- ❑ Vertical Dimensions Of Passage (mm): 2017x720x278



18 Zone DFMD
BS-800/18

- ❑ 18 Zone Door Frame Metal Detector
- ❑ Working Voltage: AC110V-240V 50/60hz
- ❑ Maximum Sensitivity 50g Metal
- ❑ Detection Zone Can Be Divided By Operator
- ❑ Alarm Sound, Light, Tones And Time Can Be Adjusted
- ❑ Detection Ability: More Than 100 People In 1 Minute



18 Zone DFMD
BS-183/18

- ❑ 18 Zone Door Frame Metal Detector
- ❑ Led Digital Control Box
- ❑ 18 Detection Zones
- ❑ Dimension: 2171x467x851mm
- ❑ Channel Size: 2021x368x716mm
- ❑ Working Humidity: 99%, No Condensation
- ❑ Working Temperature: -20-85°C
- ❑ Input: AC 100V-240V/50hz-60hz
- ❑ Detection Sensitivity: 0-200 Levels
- ❑ 50 Optional Working Frequency Bands
- ❑ Fault Code Indication Function
- ❑ With Led Body Position Indicator
- ❑ Port For Battery Backup



Single Panel 5 Zone DFMD
BS-500/5

- ❑ Single Panel 5 Zones
- ❑ One Panel, Two-Ways Detection.
- ❑ Unique Three Led Bar Lights, Middle For Stand By,
- ❑ Left/Right For Alarm Separately For Each Side Alarm Separately,
- ❑ Big And Strong Foot For Stability
- ❑ High Performance, High Sensitivity And High Stability
- ❑ Operating Voltage AC100V~240V 50/60hz



Single Zone DFMD
BS-800/1

- Single Zone Door Frame Metal Detector
- Working Voltage: AC110V-240V 50/60Hz
- Maximum Sensitivity : 50g Metal
- Detection Zone : Can Be Divided By Operator
- Alarm Sound,Light, Tones & Time Can Be Adjusted
- Detection Ability:More Than 100 People In 1 Minutes



24Zone DFMD
BS-800/24

- 24 Zone Door Frame Metal Detector
- Working Voltage: AC 110V-240V 50/60Hz
- Maximum Sensitivity: 50g Metal
- Detection Zone Can Be Divided By Operator
- Alarm Sound, Light, Tones And Time Can Be Adjusted
- Detection Ability: More Than 100 People In 1 Mintue



Hand Held Metal Detector
BS-800/1

- Detection Sensitivity: 2 mm Ball
- Operating Frequency :22Khz
- Alarm Mode : Sound & Light ,Vibration
- Power Consumption : 270mW.
- Current : Less Than 50mA
- Power Supply: 9 Volt Battery
- Rechargeable Battery & Adapter (optional)

Entrance Gate Automation System



BS-800/1

- Sliding Gate Operator AC
- Power Supply: 220V±10%/50Hz
- Motor: 220V 50 Watt
- Gate Moving Speed: 11m/min
- Max Gate Weight: 300kgs
- Environmental Conditions: From -25°C TO +50°C
- Protection Class: IP44
- Dimensions: 273mmx160mmx240mm



SGO-60

- Sliding Gate Operator AC
- Power Supply: 220V±10%/50hz
- Motor: 220V 50 Watt
- Gate Moving Speed: 11m/min
- Max Gate Weight: 600kgs
- Environmental Conditions: From -25°C To +50°C
- Protection Class: IP44
- Dimensions: 309mmx119mmx244mm



B024

- ❑ Sliding Gate Operator AC
- ❑ Power Supply: 220V±10%/50hz
- ❑ Motor: 220V 50 Watt
- ❑ Gate Moving Speed: 11m/min
- ❑ Max Gate Weight: 1000kgs
- ❑ Environmental Conditions: From -25°C To +50°C
- ❑ Protection Class: IP44
- ❑ Dimensions: 340mmx205mmx275mm



BOL-59S

- ❑ Lifting Height: Standard 600mm
- ❑ Bollard Wall Thickness: 612 mm (Customized)
- ❑ Motor: 3HP 4P Three-Phase 380V (Industrial Grade)
- ❑ Bollard Material: 304 Stainless Steel
- ❑ Protection Level: IP68
- ❑ Collision Grade: K12 Equivalent To The Impact Of 120KM/, The Car Was Stopped, The Equipment As Usual
- ❑ Speed Rising Speed: 35(Adjustable), Falling
- ❑ Falling Speed: <35 Adjustable
- ❑ Through The Pressure: Bearing Over 80 Tons Container Truck



SGW-40

- ❑ Powerful Wheel Drive DC 24V Motor Makes It Ideal For The Heavy Gate And High Frequency Application.
- ❑ Power Supply: 220VAC 50hz/110AC 60hz
- ❑ Max Thrust: 600N
- ❑ Working Speed: 2.4Cm/S
- ❑ Max Single Leaf Width: 5m
- ❑ Working Temperature: -20°C To +50°C
- ❑ Electric Motor Power: 24V 100W2
- ❑ Max Single Leaf Weight: 400kg
- ❑ Protection Class: IP55



Rail Track

Rail Track For Sliding Gate Operator



BOL -59CT

Controller Cabinet For Bollard (Control Upto 4 Bollards)

Time Attendance



BS-12

- ❑ Finger User Capacity:3000
- ❑ Card User Capacity : 3000
- ❑ Password User Capacity:3000
- ❑ Log Capacity : 1,00,000
- ❑ Communication Interface: TCP/IP, USB, WiFi (Optional)
- ❑ Screen Size : 2.4 Inch TFT Color Screen
- ❑ Access Control



BS-28

- ❑ Finger User Capacity:5000
- ❑ Card User Capacity : 5000
- ❑ Password User Capacity:5000
- ❑ Log Capacity : 1,00,000
- ❑ Communication Interface: TCP/IP, USB, WiFi (Optional)
- ❑ Screen Size : 2.8 Inch TFT Color Screen
- ❑ Access Control : Pro Access Control



BH-104

- ❑ Face User Capacity:1000
- ❑ Finger User Capacity: 10000
- ❑ Card User Capacity : 1500
- ❑ Password User Capacity:5000
- ❑ Log Capacity : 2,00,000
- ❑ Communication Interface: TCP/IP, WiFi,USB Flash Drive, 4G (Optional)
- ❑ Screen Size : 2.4 Inch TFT Color Screen
- ❑ Access Control : Pro Access Control



BH-40

- ❑ Face user capacity : 1500
- ❑ Finger User Capacity: 5000
- ❑ Card User Capacity : 1500
- ❑ Password User Capacity: 1500
- ❑ Log Capacity : 2,00,000
- ❑ Communication Interface: TCP/IP, WiFi,USB Flash Drive, 4G (Optional)
- ❑ Screen Size : 2.4 Inch TFT Color Screen
- ❑ Access Control : Pro Access Control




BH-05

- ❑ Face User Capacity:5000
- ❑ Card User Capacity : 5000
- ❑ Password User Capacity:5000
- ❑ Log Capacity : 5,00,000
- ❑ Communication Interface: TCP/IP USB WiFi
- ❑ Screen Size : 4 Inch TFT Color Screen
- ❑ Access Control :Lock, Push Button
- ❑ Exit Reader




BH-32

- ❑ Face User Capacity :10000
- ❑ Finger User Capacity:10000
- ❑ Card User Capacity : 10000
- ❑ Password User Capacity:10000
- ❑ Log Capacity : 2,00,000
- ❑ Communication Interface: TCP/IP, WiFi,USB Flash Drive, 4G (Optional)
- ❑ Power Supply : DC12V/2A
- ❑ Access Control : Pro Access Control

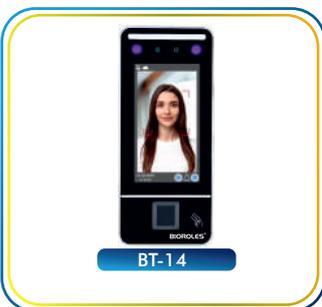

BT-14

- ❑ Face User Capacity : 10000
- ❑ Finger User Capacity: 10000
- ❑ Card User Capacity : 10000
- ❑ Password User Capacity: 10000
- ❑ Log Capacity : 2,00,000
- ❑ Communication Interface: TCP/IP, WiFi,USB Flash Drive, 4G (Optional)
- ❑ Power Supply : DC12V/2A
- ❑ Access Control : Pro Access Control

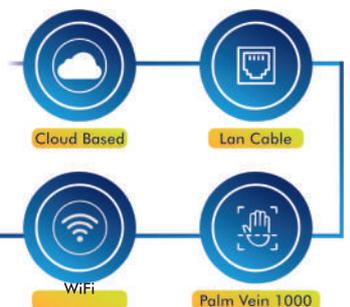



BS-606Ai

- Face User Capacity: 5000 (Expandable Upto 50k)
- Card User Capacity : 5000
- Password User Capacity: 5000
- Log Capacity : 5,00,000
- Communication Interface: TCP/IP USB WiFi
- Screen Size : 4.3 Inch TFT Color Touch Screen
- Access Control: Lock, Push Button, Exit Reader



BS-607Ai

- Finger User Capacity: 1000 (Expandable Upto 15k)
- Face User Capacity: 5000 (Expandable Upto 50k)
- Card User Capacity: 5,000 (Expandable Upto 50k)
- Password User Capacity: 5,000 (Expandable Upto 50k)
- Log Capacity: 5,00,000
- Communication Interface: TCP/IP, USB, WiFi
- Screen Size: 2.4 Inch TFT Color Touch Screen
- Access Control: Lock, Push Button Exit Reader



BSF-1505

- Finger User Capacity: 5000
- Face User Capacity: 5000
- Card User Capacity: 5,000
- Password User Capacity: 5,000
- Log Capacity: 5,00,000
- Communication Interface: TCP/IP, USB, WiFi
- Screen Size : 7 Inch TFT Color Touch Screen
- Access Control: Lock, Push Button, Exit Reader

Multi-Door Controller & Elevator Controller



Access Controller

AD-1

- Access Controller For Door/Barrier /Turnstiles
- 1 Door 2 Reader
- 42000 Cards, 200000 Record Capacity
- TCP/IP, Free Windows Software
- Compatible With EM/Mifare /HID Readers And Cards
- Time Zone, APB, Grouping, Inter Locking



Access Controller

AD-2

- Access Controller For Door/Barrier /Turnstiles
- 2 Door 4 Reader
- 42000 Cards, 200000 Record Capacity
- TCP/IP, Free Windows Software
- Compatible With EM/Mifare /HID Readers And Cards
- Time Zone, APB, Grouping, Inter Locking



Access Controller

AD-4

- Access Controller For Door/Barrier /Turnstiles
- 4 Door 8 Reader
- 42000 Cards, 200000 Record Capacity
- TCP/IP, Free Windows Software
- Compatible With EM/Mifare /HID Readers And Cards
- Time Zone, APB, Grouping, Inter Locking



Biomac S2

Access Controller

Project Series

- Web/Cloud Based Multi Door Controller
- Manage Upto 8 Doors 2 Way (Wiegand)
- No. Of Cards Storage: 20,000
- No. Of Transaction Storage: 60,000 Logs
- Built In Web Server



Biomac D4

Access Controller

Project Series

- Web /Cloud Based Multi Door Controller
- Manage Upto 4 Doors 1 Way (Wiegand)
- No. Of Cards Storage: 20,000
- No. Of Transaction Storage: 60,000 Logs
- Built In Web Server



EVC16A

Elevator Controller

- Elevator Control Panel
- Rs485 Connection Over Controller And Reader.
- 16-Storey Floor Control Per Evc5816A System.
- 20,000-50,000 Cardholders Capacity Per System.
- 10 Layers Bypass Time Zone For Doors/Users Access Authority.
- Software (Lift Control Module)



BIOMAC-0S202

Access Controller For Door / Barrier/ Turnstiles

Project Series

- 2 Door 4 Reader (Wiegand)
- 2 Door 4 Reader (OSDP)
- AES Communication (AES-128, TSL 1.2, HTTPS)
- 200000 Cards, 500000 Record Capacity System Log Capacity 20k
- TCP/IP Web And Cloud Software
- Compatible With EM/Mifare/HID Readers And Cards
- Time Zone, APB, Grouping Etc.
- POE Compatible



BIOMAC-R21

Access Controller For Door /Barrier/Turnstiles

- 1 Door Touch Keypad
- 60000 Cards, 30000 Record Capacity
- System Log Capacity 1536
- TCP/IP, Builtin Web Based Software
- Exit Reader
- Compatible With EM/Mifare/HID Readers And Cards
- Time Zone, APB, Grouping Etc.
- POE Compatible



MAC-102

Elevator Controller

- Web /Cloud Based One Door Controller
- Manage Upto 1 Doors 2 Way (Wiegand)
- No. Of Cards Storage: 20,000
- No. Of Transaction Storage: 65,000 Logs
- Built In Web Server



BBPU-60W

Online Battery Backup Smpps

- Input -100 Volt AC To 300 Volt AC
- Frequency - 50Hz To 60Hz
- Out-Put -12V DC - 5Amp
- Charging Volt - 13.8V DC 0.7Amp
- Out-Put Low Voltage Cut off
- Out-put Short Circuit Protection
- Battery Supported By -12V- 7Ah, 7.5Ah & 8Ah



Biomac S3-V4
Elevator Controller
Support 128 Floor

- Send Real Time Logs Data Actively
- Sent Offline Log Data Automatically
- Complete Features On WEB-Based Management
- Standalone And Network Capability
- Integrate IP Camera For Real Time Snap Shot
- Support DST (Daylight Saving Time) Function
- Support Visitor Card Management
- Option For Floor Security control
- Support Remote control And Intercom System
- E-mail / SMS Event Alarm
- Wiegand / RS-485 Reader Connection



Biomac F-33

- Communication Interface : RS-485
- Relay Output: 16 (1A/30V DC)
- Exit Button Can Be Operated When Controller Is Disconnected Under Emergency Mode.
- Built-In Watch Dog.
- Operation Power: 9-24V DC
- Rated Current: 800 mA
- Operation Temperature: 0°C-65°C
- Dimension: 179 x 141 x 29 mm.
- Weight :650g.



Biomac A-15

- Communication Interface: RS-485
- Wiegand Input: 2 (WG26/34 Auto detect)
- Exit Button Can Be Operated When Controller Is Disconnected Under Emergency Mode.
- Built-In Watch Dog.
- Door Relay (Relay D): 1(3A/30VDC)
- Rated Current: 200 mA ~ 400 Ma
- Operation Temperature: 0°C ~ 55°C
- Dimension: 106 x 100 x 26.5 mm
- Weight : 140g.

Standalone Access Control



BK12V

- Push Keypads+ABS Body
- Support EMID Card (12Khz)
- User Capacity 2000 Users
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V



KM-45

- Touch Keypads + ABS Body
- Support EMID Card ,Mifare
- User Capacity 2000 Users
- Connect Exit Switch
- Connect Exit Reader
- DC12V



KM35A

- Push Keypads + ABS Body
- Support EMID Card (125Khz)
- User Capacity 2000 Users
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V



BS-FM5

- WiFi OLED Display Access Control
- Touch Keypad, With OLED Display
- Waterproof, Conforms To IP66
- Metal Housing, Anti-Vandal
- EM Card 10000 User 10k
- Fingerprint User 200
- Add/Delete Users By APP
- Can Set Time Restriction For Users
- Temporary Password (One-Time Or Period Code)
- Support Checking Opening Record
- Multiple Access Modes: Smart Phone, Card,Pin,Doorbell Call



WiFi



PIN



FINGERPRINT



CARD



SMART LIFE APP



IP66



KM31E

- Button Push Keypads + ABS Body
- Support EMID Card (125KHz)
- User Capacity 2000 Users
- Connect Exit Reader
- Connect Exit Switch
- DC12V



KM32E

- Button Push Keypads+ABS Body
- Support EMID Card (125KHz)
- User Capacity 2000 User
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V



BT12

- Touch Keypads + ABS Body
- Support EMID Card,Mifare
- User Capacity 2000 Users
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V



A51

- Touch Keypads + Metal Body
- Support EMID Card 10k+
- Fingerprint 200
- User Capacity 2000 Users
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V + IP68
- Smart Life App



BS-50L

- Touch Keypads + Metal Body
- Support EMID Card 10k+
- Fingerprint 200
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V + LCD Display



A52L

- Touch Keypads + ABS Body
- Support EMID Card 10k + Fingerprint 200
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V + LCD Display



A-30

- Remote + Metal Body
- Support Mifare Card 200+ Fingerprint 1000
- Connect Exit Reader
- Connect Exit Switch
- DC12V+IP68



BMT-12

- Touch Keypads + Metal Body
- Support EMID Card
- User Capacity 2000 Users
- Connect Exit Switch
- Connect Exit Reader
- Connect Door Bell
- DC12V + IP 68



BMK-16

- Push Button Keypad + Metal Body
- Support EMID Card
- User Capacity 2000 Users
- Connect Exit Reader
- Connect Exit Switch
- Connect Door Bell
- DC12V+IP 68

Guard Patrol System



WM-5000X1

- ❑ Fingerprint RFID Guard Tour System
- ❑ IP Rating IP67
- ❑ Reading Mode RFID 125khz,
- ❑ Reading Distance 3cm - 5cm
- ❑ Communication Pogo Pin USB(Drive-Free)
- ❑ Battery 3.7v/2000mah Rechargeable Lithium Batteries
- ❑ After Low Power, For 16 Days Using.
- ❑ Prompt Vibration + Oled Display + Voice
- ❑ Night Patrols Can Also Be Convenient
- ❑ High Led Lighting, Effective Irradiation Distance of 6 Meters,
- ❑ Night Patrol More Convenient
- ❑ Security Guard Management Software



WM-5000V4S

- ❑ High-Light Flashlight Security Guard Tour System
- ❑ IP Rating IP67
- ❑ Reading Mode RFID 125khz,
- ❑ Reading Distance 3cm - 5cm
- ❑ Communication Pogo Pin USB (Drive-Free),
- ❑ 15000 Record Uploading/Min, (Battery Life 1 Record/Sec, For 40 Hours Using 2 Reading 500 Record/Day, For 30 Days Using.)
- ❑ Prompt Vibration With Colorful Led Light (Red/Green/Blue)
- ❑ Security Guard Management Software



WM-5000L4

- ❑ Fingerprint Identification. Prevent Guard Cheating,
- ❑ GPS Tracking. Track Patrol Tracks Of Guard In Real-Time And Support Playback.
- ❑ Support Upload Data Online.
- ❑ Voice Call Function. Memory 5 Fixed Contact Numbers.
- ❑ Managing, Tracking Employees.
- ❑ Strong And Durable, Dustproof And Waterproof Rating Is IP67.
- ❑ Vibration + LED Flash Prompt Working Status.
- ❑ Long Battery Life, Low Power Consumption.
- ❑ Free Management Software



Coin Tag

- ❑ Guard Tour Coin Tag



JWM Tag

- ❑ Guard Tour Tag

Smart Door Locks



Glass Door Lock
CP-93

- Unlocking Method: APP, FP/Card/Password, Remote
- Features: Doorbell, Featured Display Voice Prompt
- FP-200/Card-1000/Password-1000 Users Capacity
- Emergency Power Unlock Feature By USB Power Source
- Power 4Nos 1.5V High Power Alkaline Batteries
- Suitable For 8-12mm Door Thickness



Glass Door Lock
BS-94

- Face and Fingerprint Smart Door Lock:
- Unlocking Method: APP, Face/FP/Card/Password, Remote
- Features: Doorbell, Featured Display, Voice Prompt
- Face-100, FP-200, Card-1000, Password-1000 User Capacity
- Emergency Power Unlock Feature By USB Power Source
- Power 1 No Li-Ion Batteries (Included)
- Suitable For 8-12mm Door Thickness



Wooden Door Lock
BS-60

- With App
- User Capacity: 300
- Lock Body Material: Steel, Key: 3 Pcs Flat Key
- Double Cylinder: Brass Double Fingerprint, Language: English
- Unlock Mode: Dual Fingerprint, Card, Password Keys
- 4Pcs AAA Battery
- Door Thickness: 45-90mm
- Cycle Test Over: 100000 Times



Wooden Door Lock
BR-70

- Unlock Mode: Fingerprint, Password, Card, Key, Indoor Knob
- Material: Stainless Steel Plus ABS
- Double Fingerprint
- Applicable Door Thickness 35-50mm



Wooden Door Lock
BR-90

- Fingerprint Capacity: 100
- Battery Life: 80,000 Time Normal Unlock
- Communication: WiFi
- Material: Aluminum Alloy
- Unlock Mode: Fingerprint, Card, Pass, Key, App



Wireless Smart Lock
BS-95WFL

- All Wireless, No Need Wires Any More, Easy For Installation And Operation
- Open Times: 16,000 Times For Lock, 10,000 Times For Keypad
- 433mhz Rolling Code Technology, Ultra Low Power Consumption
- Metal Wireless Fingerprint Keypad, (IP65)
- 1000 Users (Including 100 Fingerprint Users + 900 Pin / Card Users)
- 4~6 Digits Pin, 125Khz Em Card
- Communication Distance: 20m Max, Open The Lock By Fingerprint Keypad, Wireless Exit Button And Remote Transmitters
- Battery Life: More Than 12 Months
- Working Outdoor. IP65 (Fingerprint Keypad)



Smart Lock
TP-618AP

- Fingerprint Smart Handle Door Lock
- Unlocking Method: APP/FP/Card Password, Alexa, Google Assistant
- Features: Doorbell, Featured Display, Voice Prompt
- Fingerprint/Card/Password-300
- Emergency Power Unlock Feature By USB Power Source
- Power 4 Nos 1.5V High Power Alkaline batteries
- Suitable for 35-50MM Door Thickness



Wireless Smart Lock
BS-96WFL

- All Wireless, No Need Wires Any More, Easy For Installation And Operation
- Open Times: 16,000 Times For Lock, 10,000 Times For Keypad
- 433mhz Rolling Code Technology, Ultra Low Power Consumption
- Metal Wireless Fingerprint Keypad, (IP65)
- 100 Card And Pin Users
- 4~6 Digits Pin, 125khz Em Card
- Communication Distance: 20m Max, Open The Lock By Fingerprint Keypad, Wireless Exit Button And Remote Transmitters
- Battery Life: More Than 12 Months
- Working Outdoor. IP65 (Fingerprint Keypad)



Wireless Smart Lock
BS-97WFL

- All Wireless, No Need Wires Any More, Easy For Installation And Operation
- Open Times: 16,000 Times For Lock, 10,000 Times For Keypad
- 433mhz Rolling Code Technology, Ultra Low Power Consumption
- Metal Wireless Fingerprint Keypad, (IP65)
- 1000 Users (Including 100 Fingerprint Users + 900 Pin / Card Users) 4-6 Digits Pin, 125khz Em Card
- Communication Distance: 20m Max, Open The Lock By Fingerprint Keypad, Wireless Exit Button And Remote Transmitters
- Battery Life: More Than 12 Months
- Working Outdoor IP65 (keypad)



Smart Lock
BS-05F

- Face and Fingerprint Smart Door Lock
- Unlocking Method: APP Face, FP, Card, Password Alexa Google
- Features: Face Camera Doorbell, HD Display, Voice Prompt
- Face-50, FP-100, Card-100 Password-100
- Emergency Power Unlock Feature By USB Power Source
- Power 4200mAh Lithium Battery, USB Emergency Port
- Suitable For 35-50mm Door Thickness



Hotel Lock
H-18

- Material: Zinc Alloy
- Card Type: Mf1
- Unlock Mode: Card, Key
- Inductive Distance: < 5cm
- Door Thickness: 35-75 mm
- Power Supply: 1.5V*4 High Capacity Alkaline Battery
- Record: 256 Door Opening Record

Access Control Accessories



V3

- V3 125Khz Proximity Card Reader,
- Read Range: 5-10cm,
- Reading Time < 300ms,
- Power: DC 5~12V/70ma,
- Output Format: 26 Bit Weigand



V8

- V8 Mifare Card Reader.
- Read Range: 5-10cm,
- Reading Time < 300ms,
- Power: DC 5-12V/70ma,
- Output Format: 26 Bit Weigand



V9

- V9 125Khz Proximity Card Reader,
- Read Range: 5-10cm,
- Reading Time < 300ms,
- Power: DC 5-12V/70ma,
- Output Format: 26 Bit Weigand



V6

- V6 125khz Proximity Card Reader,
- Read Range: 5-10cm,
- Reading Time < 300ms,
- Power: DC 5-12V/70ma,
- Output Format: 26 Bit Weigand



V5

- V5 125Khz Proximity Card Reader,
- Read Range: 5-10cm,
- Reading Time < 300ms,
- Power: DC 5-12V/70ma,
- Output Format: 26 Bit Weigand



QR1

- QR1 Code Card Reader With TCP/IP Output



QR2

- QR 2Code Card Reader Weigand



BPDE1

- Dome Exit Switch Metal Heavy Duty



BP6

- BP6 A Series Button Is Casted By 304 Stainless Steel With Drawing Panel Processing.It Is Elegant Style With Long Time Usage



BP6A

- BP6A Series Button Is Casted By 304 Stainless Steel With Drawing Panel Processing.It Is Elegant Style With Long Time Usage



BP6+

- BP6 + Series Exit Switch 304 Stainless Steel Elegant Style With Long Time Usage No /Nc/Com



BPZ30

- Zinc Exit Switch With Back Box For Surface Mount It Is L-80mm W-30mm H-25mm, Highly Used For Doors With Narrow Frame



BNT2

■ Touch Button
Blue And Green Led Lights.
Dimension L-86mm W-50mm
H-20mm



BPE9

■ BPE 9 Series Button
Dimension :L-86mm W-43mm
H-13 mm



BPE5

■ BPE 5 Series Button
Dimension L-86mm W-86mm
H-20 mm



BPE5+

■ BPE5+ Series Button
Dimension L-86mm W-43mm
H-13 mm



BP86L

■ BP86 Led Series Exit Button
Stainless Steel Durable
Elegant Style



BP-K1

■ Key Switch Stainless Steel
Durable Elegant Style



BNT3

■ No Touch Sensor Door
Release Button Switch
DC 12V. (SS 304)



BNT4

■ No Touch Sensor Door
Release Button Switch
DC 12V. (SS 304)



BNT5

■ No Touch Sensor Door
Release Button Switch
DC 12V. (SS 304)



BNT6

■ V9 125khz Proximity Card
Reader, Read Range :5-10cm
Reading Time <300ms,
Power : DC 5-12V/70 Ma,
Output Format : 26 Bit Wiegand



BNT7

■ No Touch Sensor Door
Release Button Switch
DC12V, (SS 304)



BNT8

■ No Touch Sensor Door
Release Button Switch
DC12V, (SS 304)



BEDR1

■ Emergency Door release Switch
Single Pole



BEDR1D

■ Emergency Door Release
Switch Dual Pole



BEDR2

■ Emergency Door Switch
Resettable Dual Pole



EDR-20G

■ EDR With Flash LED Light
And Dual Tone Sound



EDR-21G

- Emergency Door Release Switch Dual Pole With Flash LED Light And Dual Tone Sound



BRM1

- Remote Lock Opener For Electrical And Magnetic Lock With Two Remote



EML600D2

- 600 LBS*2 EM Lock Suitable For Double Leaf Door Without Feedback



EML600D5

- 600 LBS*2 EM Lock Suitable For Double Leaf Door Without Feedback



EML1200D5

- 1200LBS*2EM Lock Suitable For Double Leaf Door Feedback



EML 6005

- 600 LBS 280kg EM Lock 5 Wire No/Nc/Com With Feedback 12/24 Selectable



EML 6002

- 600 LBS 280kg EM Lock Without Feedback



EML16005

- 600 LBS 280kg EM Lock With Feedback



EML 102

- 100 LBS 60Kg EM Lock Without Feedback



EML 302

- 300 LBS 180 Kg EM Lock Without Feedback



EML 305

- 300 LBS 180Kg EM Lock With Feedback



EML 12005W

- 1200 LBS 500Kg EM Lock With Feedback 12/24 Switchable



EML6002R

- 600 LBS 280 Kg EM Lock With Remote



BVPEL2

- Motorised Rim lock



BVPEL3

- Motorised Rim Lock 5 Brass Key, Single Cylinder, Remote Card



BVPEL 1

- Rim Lock With 6/8 Comp. Brass Key, Single Cylinder, Dual Cylinder No/Nc Feature



BB101

☑ Frameless Drop Bolt Lock For Glass Door



B-SBS1

☑ Surface Bolt Lock



BB102

☑ Bolt Lock 2Wire Without Feedback



BB105

☑ Bolt Lock 5Wire With Feedback And Timer



BB106KC

☑ Fail Secure Bolt Lock With Cylinder And Key



BB108

☑ Fail Secure Bolt Lock



BS130/No/Nc

☑ Strike Lock Small No/Nc



BS132

☑ Strike Lock Long No/Nc



BDL1

☑ Smart Card Drawer Lock



BDL2

☑ Password Based Drawer Lock



MC1C/MC1NO

☑ Small/Magnetic Contact No/Nc



MS-SH1

☑ Shutter Magnetic Contact



ZL Bracket

☑ ZL Bracket For 600/1200 LBS EM Lock



U Bracket

☑ U Bracket For 600/1200 LBS EM Lock



L Bracket

☑ L Bracket For 600/1200 LBS EM Lock



LC Bracket

☑ LC Bracket For 600 Lock



I60

■ I Bracket To Hold 600 LBS EM Lock Armature Plate



DB1

■ Door Bell For Access Control 12VDC



BHT/RHT

■ Hooter For Access Control And Intrusion 12V DC



DB1

■ Hooter For Fire And Intrusion 12/24V DC Triple Tone



BR-MFU

■ Mifare Smart Card USB Card Reader
Read Range : 5-10cm,
Reading Time:<300ms
Power: USB Power



BRMGG

■ GG Bracket For 600 LBS EM Lock Used For Frameless Glass Door



BB-LU

■ Bolt Lock SS Bracker For Door



BEN1

■ Access Control Enclosure With Lock And Key



H-ES1

■ Energy Saving Switch



BB-LU2

■ Bolt Lock Aluminium Bracket For Door



BB-LU1

■ Bolt Lock SS Bracker For Door And Frame



SMPS

■ SMPS-Made In India Access Control /CCTV SMPS 3 ANP 12V DC 5 AMP 12VDC 7AMP 12V DC, 10AMP 12V DC



UZ43

■ UHF Card



ISOP

■ Thin Card



PROX1

■ Proximity 0.8mm Card



PTAG1

■ Proximity Tags



UZ41/42

■ UHF Soft Lable
■ UHF Anti- Dismantle Soft Tag



UZ42

■ UHF Anti- Dismantle Soft Tag



H-EN/S

■ Hotel Lock Encoder And Software



MF-1

■ Encrypted Hotel Lock Card

Software Solutions



PARKING MANAGEMENT SYSTEM

- Parking Space Monitoring
- Automatic Ticket Generation
- Fee Calculation
- Real-Time Notifications
- Exit and Payment Process

- Pre-booking and Reservations
- Data Analytics and Reporting
- Security Features
- User-Friendly Interface



PARKING GUIDANCE SYSTEM

- LPR/FastTag Dual Recognition
- Adjust View Angle Remotely
- Parking Space Detection
- Alarm Notify
- Parking Period Limit

- Rental Parking Management
- Fast Recognition Speed
- Zero Loss Of Parking Status Update
- EV Charging Parking Space Management
- Reserved Parking Space



SOCIETY MANAGEMENT SYSTEM CLOUD/APP

- Resident Management
- Delivery Management
- Support Managements of Multi gate/ Multi Tower
- Attendance Management
- Domestic Help /Management


- Access Control
- Billing Management
- Visitor Management
- RFID / LPR Based Vehicle Management
- Amenities Booking / Schedule Management



GYM MANAGEMENT SYSTEM


- Member Management
- Billing & Payments
- Slot Scheduling & Booking
- Trainer & Staff Management

- Reporting & Analytics
- Mobile App Integration
- Biometric Access Control Integration
- Additional Features Can Be Customised

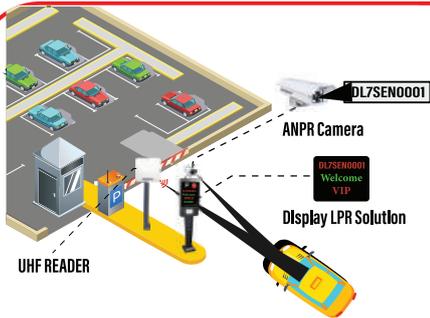

VEHICLE ACCESS CONTROL MANAGEMENT SYSTEM

- ✔ Authentication : Rfid Tags , Anpr, Biometric Access Mobile App Access
- ✔ Lot & Cloud Connectivity – Centralized Management And Data Storage.
- ✔ Cctv Integration live Feed Access
- ✔ Integrated With Barriers With Bollards
- ✔ Logging And Reporting: Entry/exit Logs
- ✔ Visitor Management – Temporary Access For Guests, With Optional Otp Or Qr Code.
- ✔ Role-Based Access Control (RBAC)
- ✔ Audit Trails – Useful for reviewing incidents or conducting investigations.
- ✔ Real-Time Alerts
- ✔ User Friendly Dashboard Interface
- ✔ Advanced Capabilities : AI-Powered Analytics, Blacklisting/Whitelisting, Fire System Integration
- ✔ ERP/HRMS Integration – For corporate parking systems.
- ✔ Parking Management Integration – Real-time tracking of available space.

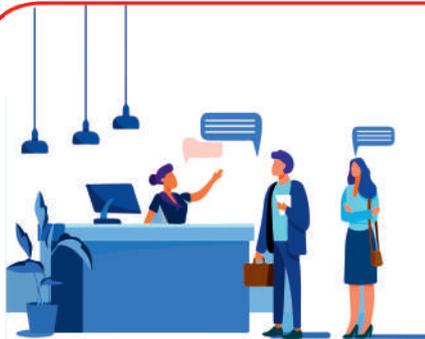

VISITOR MANAGEMENT SYSTEM

- ✔ Online Registration Process Employee / Visitor can pre-register visitors
- ✔ Seamless Door Access Assignment
- ✔ Comprehensive Visitor Data Management
- ✔ Visitor Route History
- ✔ Integrated with the Bioroles Door Access System
- ✔ Web and Mobile APP Solution
- ✔ Reports and Analytics
- ✔ Eliminate Manual Visitor Logbooks
- ✔ Effective Emergency Audit
- ✔ Blocked Visitors List
- ✔ User-Friendly Interface



TIME ATTENDANCE SOFTWARE

- ✔ Effortable Attendance Management With One-Click Reporting
- ✔ Remotely -Anytime, Anywhere Mark Attendance With Gps-enabled App
- ✔ Remote Registration Of Face / Finger / Card
- ✔ Remote Device Manager Add/Edit/Remove User
- ✔ Transfer Face / Finger / Card From Single Device To Multiple Devices
- ✔ Optional Payroll Management For Sme
- ✔ Time Zone And Group Management
- ✔ Bulk Employee Upload Via Excel
- ✔ Apply Leave Application Online
- ✔ Live Attendance Logs



LIBRARY MANAGEMENT SYSTEM

- ✔ RFID/QR Code Based Book Management
- ✔ Library Resource Management
- ✔ Online Access & Report
- ✔ Search Facility
- ✔ Smart Card Based Member & Fee Management
- ✔ Inventory Management

Trusted By



Exhibitions



IFSEC 2019



SAFE CHENNAI 2022



IFSEC DELHI 2022



IFSEC DELHI 2024




IFSEC MUMBAI 2022



IFSEC DELHI 2023



SAFE MUMBAI 2024

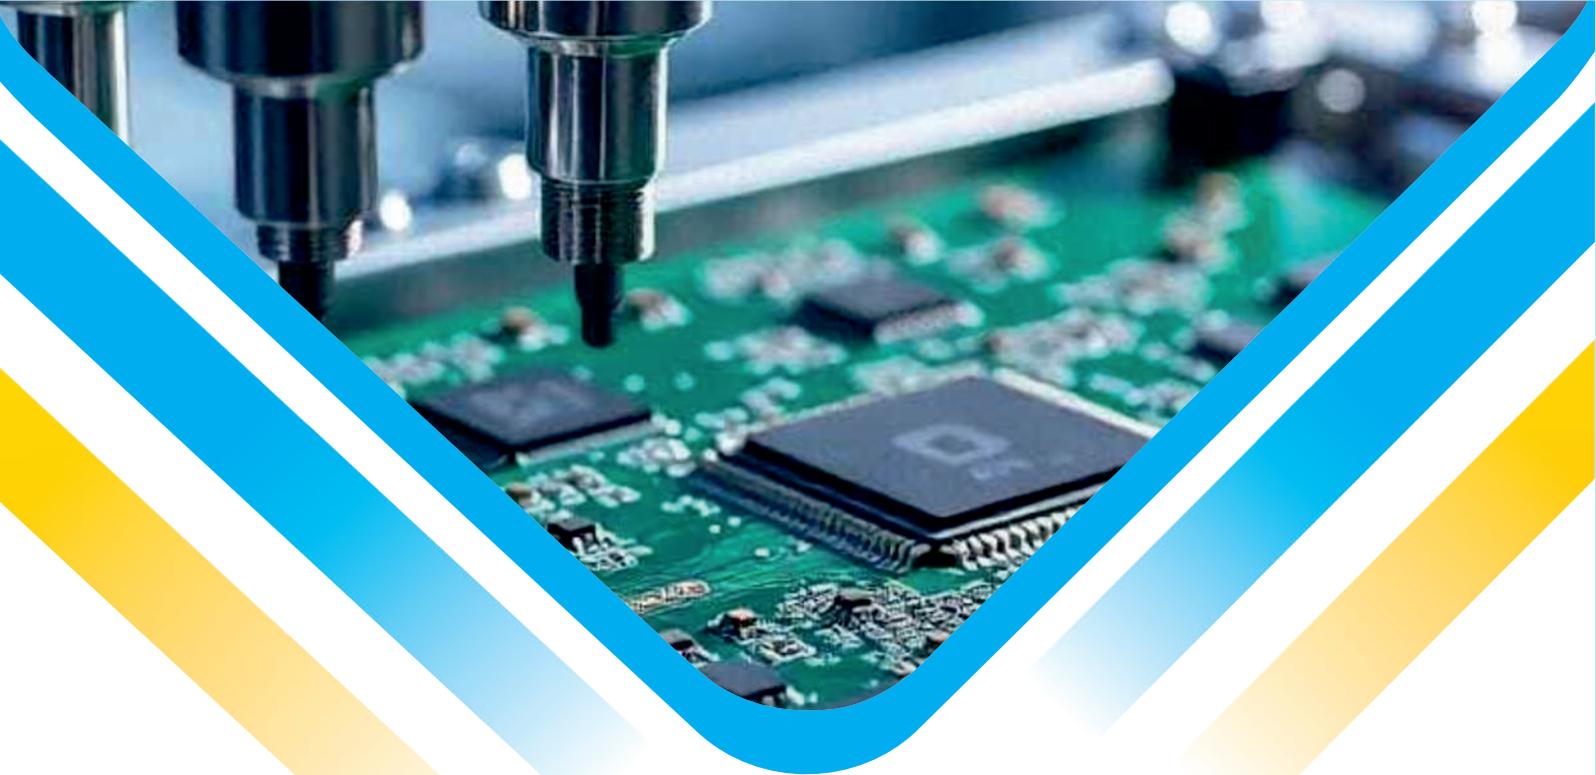

BIOROLES®

Bioroles Automation Systems Pvt.Ltd.

F-90/9 Okhla Industrial Area-Phase 1, New Delhi-110020

1500+
Channel Partners



GeM
Government
E Marketplace

एन एस आई सी
NSIC
ISO 9001 : 2008



www.bioroles.com