


18 Zone Walk Through Metal Detector

BS-800/18

Features

- Sound and light alarm: 3 options for adjustable volume alarm sound: high, low, or no voice, adapted to the use of different occasions
- Adjustable sensitivity for each zones: Each zone has 100 sensitivity level (0 to 99). Pre-set the size of the metal objects, can be avoid the false alarms such as coins, buttons, jewelry, belt buckles and ect
- Digital pulse technology: Digital signal processing filter systems, have excellent anti-jamming capability.
- Password protection: Only enter the correct password; you can set the sensitivity and other parameters. Password is 4-digits, it can be set by the user.
- Counting Statistics: Count the quantity of the passed people and the times of alarm..
- Harmless: harmless to the heart pacemakers in the human boty, pregnant women, magnetic floppy disk, tape and ect

Dimension

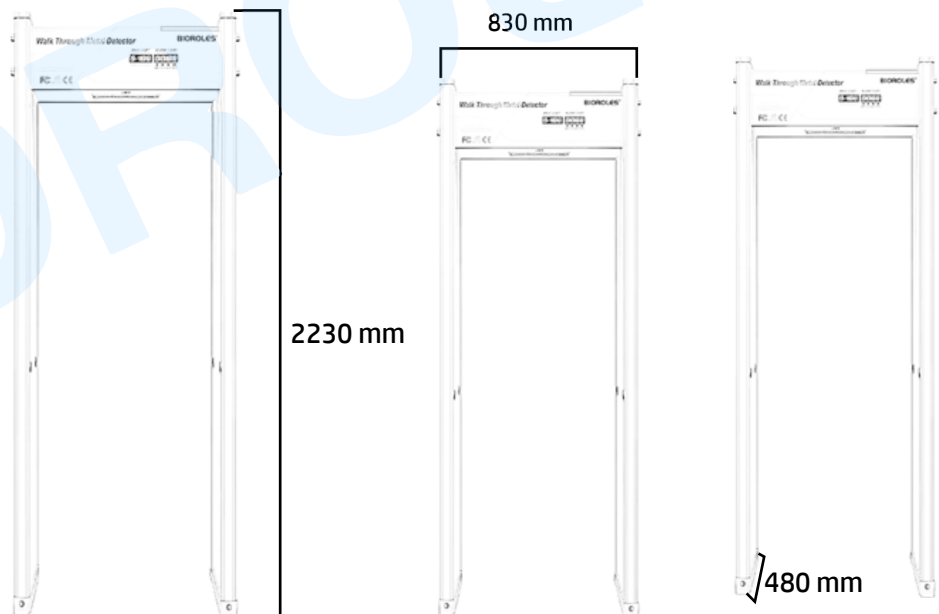

Technical Parameters

| | |
|--------------|--------------------------------|
| Power Supply | AC85V-264V/47.5-60Hz |
| Net Weight | 67Kg |
| Power | <15W |
| Enviroment | -20 C - 45 C |
| Working | Waterproof can be used outside |
| Dimensions | 2230(H)x830(W)x480(D) mm |

